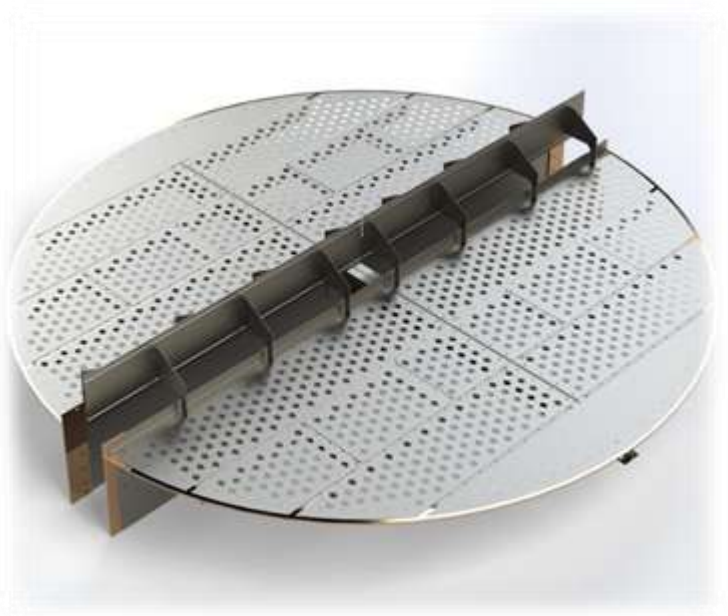


PARGASIRAN CO.

PROJECT: TOWER INTERNAL FOR PHASE 9 & 10 (CONDENSATE STABILISER)

ENQUIRY REF.: DI-6340S-0510-OI-0040-R0

Euroslot Pars
No. 2,Unit 2 East 32nd. St.,(East Qeysari)
South Allameh Ave., Sa,adatabad Area
Tehran-IRAN
Tel : (+9821) 88 68 69 42, 3
Fax: (+9821) 88 68 61 68
Website: www.euroslotpars.com
E-mail: marketing@euroslotpars.com

Offer Approved by:

Dariush Molaei

Economic Code: 4113-3138-7489

Banks:

SAMAN-Darya Blvd. Sa'adatabad Branch (Code: 883): Acc. NO: 883-741-2040710-1 **(**Swift: ABCIRTHXXX**)** (€)

SAMAN-Darya Blvd. Sa'adatabad Branch (Code: 883): Acc. NO: 883-810-2040710-1(Rial)

SUMMARY

- **SCOPE OF WORK**
- **SCOPE OF SUPPLY**
- **MATERIAL SUMMARY LIST**
- **DESCRIPTION OF ITEMS**
- **GENERAL TECHNICAL NOTES**
- **DELIVERY**
- **LIQUIDATED DAMAGES FOR DELAY**
- **PACKING**
- **SALES CONDITION**
- **DOCUMENTATION**
- **TESTS & INSPECTIONS**
- **CODE REFERENCE**
- **ORIGIN**
- **GUARANTEE**
- **LIABILITY**
- **CONFIDENTIALITY**

SCOPE OF WORK

- Fabrication/Manufacturing
  - Procurement of all bulk materials
  - Fabrication of Tower Internal Parts
- Inspection on shop
- Packing

SCOPE OF SUPPLY

- Items and quantities as stated in the material summary list:

MATERIAL SUMMARY LIST

ITEM	TAG No.	DESCRIPTION	QTY.
1	103-C-101/201	CONDENSATE STABILISER	2 SETS

DESCRIPTION OF ITEMS

SER N°	ITEM DESCRIPTION	QTY.	
1	**CONDENSATE STABILIZER FOR 103-C-101/201** ***Specification of Chimney Tray:*** ***Dwg. No. VP-63405-103-CI101-010, SH 8/11, Rev. F*** ✓ Shell I.D.: Ø2600mm ✓ Tray Type: Chimney Tray ✓ Tray Deck Thk.: **3mm** ✓ Riser Height: **1050mm** ✓ Riser Thickness: 3mm ✓ Riser Hat Thickness: 3mm ✓ Vortex breaker and support beam are excluded. ✓ Requested Qty. of Tray: **1 No.** ✓ Material: **AISI 304L** ***Specification of Even Trays #2-14 & 16:*** ***Dwg. No. VP-6340S-103-CI101-007, SH 5/11, Rev. F*** ✓ Shell I.D.: Ø2600mm ✓ Tray Type: Valve Tray ✓ Tray Deck Thk.: **2mm** ✓ Down comers Thk.: **2mm** ✓ Tray Spacing: • tray #2: **2400mm** • tray #4~8 & 10~16: **600mm** ✓ Type of Valve: MR2 ✓ Qty. of valve on each tray: • Light Valve, Qty.: **138 PCS**, Thk.: **1.5mm** • Heavy Valve, Qty.: **256 PCS**, Thk.: **2mm** ✓ Clamp Thk.: 2mm (Min.) ✓ Washer Thk.: 2mm (Min.)	**2 SETS**	

- ✓ Bolting size: M10
- ✓ Requested Qty. of Trays: **8 No.**
- ✓ Material: **AISI 304L**

Specification of Gas Inlet Pipe B2:
Dwg. No. VP-63405-101-C101-006, SH 4/11, Rev. F

- ✓ Pipe size: 18”, Sch. 10S
- ✓ 22 slot will be considered on pipe.
- ✓ Gasket Thk.: 3mm
- ✓ Requested Qty. of inlet Pipe: **1 No.**
- ✓ Material: **AISI 304L**

Specification of Odd Trays #3-15:
Dwg. No. VP-63405-103-CI101-008, SH 6/11, Rev. F

- ✓ Shell I.D.: Ø2600mm
- ✓ Tray Type: Valve Tray
- ✓ Tray Deck Thk.: **2mm**
- ✓ Down comers Thk.: **2mm**
- ✓ Tray Spacing:
  - tray #3-15: **600mm**
  - tray #9: **750mm**
- ✓ Type of Valve: MR2 (Light & Heavy valve Thk.: 1.5mm/2mm)
- ✓ Seal Pan Below Tray No. 9 are considered for installation.
- ✓ Clamp Thk.: 2mm (Min.)
- ✓ Washer Thk.: 2mm (Min.)
- ✓ Bolting size: M10
- ✓ Requested Qty. of Trays: **7 No.**
- ✓ Material: **AISI 304L**

Specification of Gas Inlet Pipe A:
Dwg. No. VP-63405-101-C101-006, SH 4/11, Rev. F

- ✓ Pipe size: 12”, Sch. 10S
- ✓ 19 slot will be considered on pipe.

	✓ Gasket Thk.: 3mm ✓ Requested Qty. of inlet Pipe: **1 No.** ✓ Material: **AISI 304L** ***Specification of Trays #17-19:*** ***Dwg. No. VP-63405-101-CI101-007, SH 7/11, Rev. F*** ✓ Shell I.D.: Ø2600mm ✓ Tray Type: Sieve Tray ✓ Tray Deck Thk.: **2mm** ✓ Down comers Thk.: **2mm** ✓ Tray Spacing: • tray #17: **750mm** • tray #18 & 19: **600mm** ✓ Type of Valve: MR2 (Light & Heavy valve Thk.: 1.5mm/2mm) ✓ Clamp Thk.: 2mm (Min.) ✓ Washer Thk.: 2mm (Min.) ✓ Bolting size: M10 ✓ Requested Qty. of Trays: **3 No.** ✓ Material: **AISI 321**		
2	**TRANSPORTATION TO SITE: (OPTIONAL)**		-
3	**INSTALLATION OF INTERNAL PARTS: (OPTIONAL)**		-
	SPECIAL DISCOUNT(EURO)		-
	TOTAL PRICE - EX WORK DELIVERY PARAND SHOP-TEHRAN (EURO)		-

***Added value tax will be added to above prices based on Islamic Republic of IRAN legislation.**

EXCLUSIONS

- Spare Part for Pre-commissioning, Commissioning, Start-Up & 2 years' operation
- Transportation, meals and accommodation of personnel (For Installation)
- Suitable Crane (For Installation)

- Utilities (Electricity, Water, Compressed Air, …) (For Installation)
- Scaffolding (Preparation of Scaffolding inside of tower for installation of removable internals)
- Cleaning of the interior surface of tower (For Installation)
- Place for mobilisation near the towers (Separate Office for Installation period) (For Installation)
- Installation of internal parts which are in scope of work of Tower Manufacturer. (Welded Items)
- Lighting and vent system (For Installation)

GENERAL TECHNICAL NOTES

- Cut edges will generally be using laser/water jet cutting techniques and therefore require little or no dressing.
- All components except small pieces will be marked by permanent marking for ease of identification.
- Any sharp edges will be removed.
- Tolerances will be as per ASME Sec. VIII Div. 1 for this type of equipment.
- We will complete any necessary strength/deflection calculations as required by the specification.

DELIVERY

Please note: the delivery time will be effective after receipt of advanced payment.

- As-Built Drawings for approval: **3 weeks** after receipt of order.
- Customer approval of drawings: **1 weeks**.
- Procurement & Manufacturing: **12 weeks** after receipt of drawings approval.
- Packing/Loading: **1 week.**
- Total delivery: **16 weeks**

Note: any delay in the return of drawings will result in a delay in the overall delivery program.

SALES CONDITIONS

- Prices are based on Ex-work delivery at our Parand-Shop_Tehran (according to INCOTERMS 2020)
- Prices are in Euro or equivalent to Rial based The remittance exchange selling rate published by www.ice.ir on the payment date.
- Validity: 4 weeks after quotation date
    - **60% Advance payment with placed order**
    - **40% Payable after fabrication and final inspection and before shipment.**

LIQUIDATED DAMAGES FOR DELAY

- Half a percent (0.5%) of delayed item price per week, however the aggregate amount of such liquidated damages shall not exceed five percent (5%) of the contract price.

PACKING

- All internals will be packed in wooden boxes.

DOCUMENTATION

- Documents will issue acc. to material requisition which some of them are listed as below:
  - As-Built Drawings in English with SI Units
  - Quality Control Plan
  - Inspection and Test Plan
  - Material certificates acc. EN 10204 type 3.1
  - Dimensional reports
  - Inspection reports
  - Final data book
  - All other documents not listed above are not included in our offer.
  - All documents will be submitted in PDF format for convenience of communication.

TEST & INSPECTION

- ITP will be issued after contract to clarify tests and inspections stages; some tests are summarized as below:
  - Visual/Dimensional Inspection
  - Packing & Marking Inspection
  - Final Inspection before shipment

CODE REFERENCE

- Our products are manufactured according to international codes:
  - Materials as per ASME section II-part D.
  - Specification for materials as per ASTM Standards
  - Bolts/Nuts as per ASME B18.2.
  - DIN, ISO standards

ORIGIN

- **Manufacturing: Euroslot pars – IRAN**

GUARANTEE

- Euroslot Pars guarantees that the equipment supplied shall be new, of first class quality and free from defects in raw materials used and workmanship.
- Euroslot Pars makes no guarantee for deterioration or failure of parts due to corrosion & erosion.
- Euroslot Pars warrants the supplied products against hidden defects in materials and workmanship for a period of eighteen (18) months from the date of commencement of operation.
- This warranty is limited to defects attributable to the Vendor's scope of supply and does not cover Process Design, Process Performance, or Mechanical Design, as the internals are fabricated based on the existing drawings/design and existing parts.
- Outdoor Storage of any equipment isn't recommended and may void the warranty.

LIABILITY

- Euro slot Pars' liability is limited to the price allocable to the equipment determined defective and in no event will Euroslot Pars' cumulative liability be in excess of the total contract price.
- Euroslot Pars will not be liable for any lost profits, special, indirect, incidental or consequential damages; whether arising under warranty, contract, negligence, strict liability indemnification, or any other cause or combination of causes whatsoever.

CONFIDENTIALITY

- This proposal is protected by copyright in it's entirely and in its parts, and maybe used only within the framework of an order placed with us. Any duplication and communication of any part of the proposal to third parties is not permitted without our prior official agreement (Via written letter or E-mail). In particular, no dimensions, weights, hydraulic data and similar may be made known to third parties.

==========